

MP56-3

MOTOR PUMPS - FOR CLEAN WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

Main Technical Data

Type	Semitrash	
Max suction head	m	8
Max Delivery Head	m	26
Delivery Volume	l/min	930

Performance curve

Graph

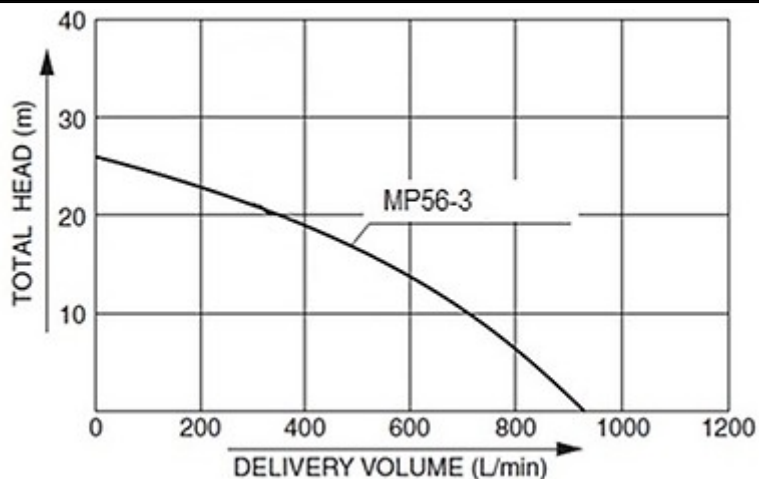

Engine specifications

Engine manufacturer		Honda
Nr. of cylinder and disposition		1 inclination angle
Displacement	cm ³	163
Fuel		Petrol
Starting system		Recoil



Pump specifications

Manufacturer		KOSHIN
Inlet pipe diameter	'	3
Outlet pipe diameter	'	3
Max Solid Size	mm	-
Material for mechanical seal		Carbon Ceramic
Material for impeller		Cast Iron
Material for volute		Aluminum Die Cast

Dimensional data

Length	(L) mm	477
Width	(W) mm	416
Height	(H) mm	466
Dry weight	Kg	28

Consumption, running time and noise

Fuel tank capacity	l	3.1
Running time	h	2.2
Noise level at 7 m	dB(A)	80
Guaranteed noise level (LWA)	dB(A)	105

General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		Standard
Oil guard		Standard



Accessories

Inlet pipes - length 8m		3"
Inlet pipes - length 25m		3"
Outlet pipes - length 10m		3"
Outlet pipes - length 50m		3"
Outlet pipes - length 100m		3"



The information is aligned with the Data file at the time of download. Printed on 24/05/2021 (ID 698)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

